

2 February 2021

The Manager Companies ASX Limited 20 Bridge Street Sydney NSW 2000

(12 pages by email)

Dear Madam

#### **GOLD AND SILVER INTERSECTIONS IN COMPLETED BAUCH PROGRAM**

- High grade gold and silver intersections confirm LANF structural target
- BADD001: 12.8 g/t Au and 380 g/t Ag (2.3% Pb, 1.4% Zn) from 89.1m to 90.1m
- BADD002: 0.91 g/t Au and 15.4 g/t Ag (0.44% Pb, 0.94% Zn) from 114.5m to 116.5m
  - o Incl. 2.07 g/t Au and 15.4 g/t Ag (0.11% Pb, 0.23% Zn) from 114.5m to 115.0m
  - o Incl. 1.24 g/t Au and 42.7 g/t Ag (1.37% Pb, 2.49% Zn) from 116.0m to 116.5m
- BADD003: 3.72 g/t Au and 74.1 g/t Ag (0.31% Pb, 0.74% Zn) from 88.8m to 89.5m
- BADD006: 151 g/t Ag, 2.07% Cu, 6.47% Pb, 6.97% Zn) from 105.2m 105.6m
- BADD006: 2.44 g/t Au and 11.2 g/t Ag (visible gold) at 76.0m
- BADD007: 69.9 g/t Ag, 0.66% Cu, 6.88% Pb, 5.43% Zn) from 151.0m to 152.0m

The Directors of Prospech Limited ('Prospech' or 'the Company') (ASX: PRS) are pleased to announce the assay results from all diamond drill holes on the Bauch prospect within the Company's Hodrusa Hamre exploration licence.


The objectives of this first drill program were to confirm the extension of a major detachment fault (locally known as a low angle normal fault or LANF) onto the Company's Hodrusa Hamre exploration licence and to locate high grade shoots within the plane of the LANF for follow up exploration. These objectives were achieved.

Mineralisation at the nearby operating Rozalia underground gold mine is controlled by the LANF, the surface trace of which falls mainly on the Company's Hodrusa Hamre exploration licence.


The results from BADD001 and BADD006 indicate the existence of at least one, near surface, high grade shoot, which will be a focus for follow-up drilling in 2021.

The Bauch vein strikes north-east and dips at 45 degrees to the south-east, in the direction of the Rozalia Mine (historic production ~1.2Mt @ 12 g/t Au, 14 g/t Ag).

Hole BADD001 intersected high grade gold and silver mineralisation, precisely corresponding to the predicted position of the Bauch vein which was investigated in the past by historic tunnels and surface workings (see cross section below) and interpreted to be an extension of the LANF.

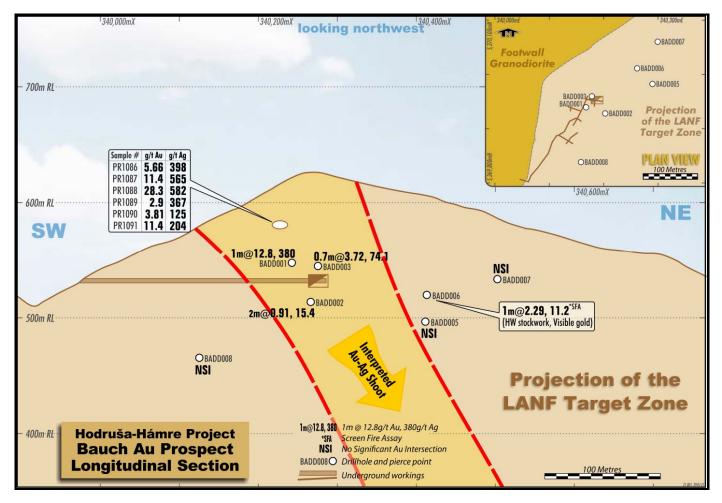

Bauch main vein longitudinal section depicting open gold-silver shoot (high grade zone within the plane of the vein structure).

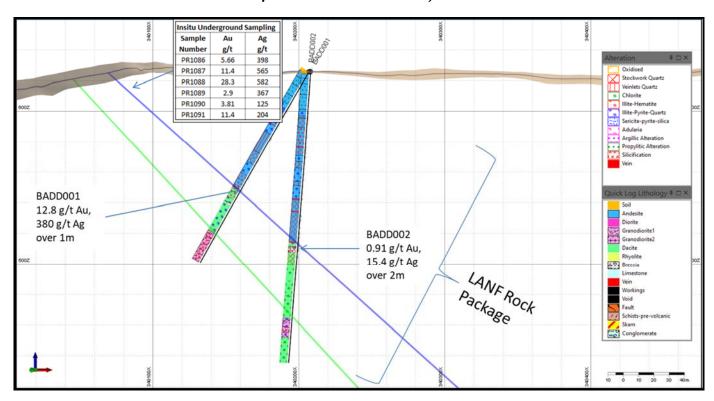


Cross section through the LANF structure. BADD001 gold and silver mineralisation occurs in the Bauch vein position which is open up and down dip and along strike. The footwall granodiorite contact also has potential to host gold, silver and/or base metal mineralised shoots.



Comparison of the mineralisation style from high grade in situ underground sample (PR1088, 28.3 g/t Au and 582 g/t Ag) and drill core in BADD001. This 0.5m section of the core assayed 17.2 g/t Au and 494 g/t Ag)

The assays from BADD001 are consistent with results from rock chip sampling of the exposed lode in one of the shallow historical tunnels, which returned high grade gold and silver values (28.3 g/t Au and 582 g/t Ag). A nearby in-situ pillar sample assayed 11.4 g/t Au and 565 g/t Ag.

BADD006 intersected a brecciated quartz vein in the main Bauch position which also carried anomalous gold and silver (0.86 g/t Au over 1.0m and 27.5 g/t Ag over 1.2m). The hanging wall breccia again carried anomalous gold values including a veinlet carrying specs of visible gold. The 1.0 metre core sample containing the visible gold was assayed using the Screen Fire Assay technique, which confirmed the presence of coarse gold. The 1.0 metre interval assayed 2.29 g/t Au and 11 g/t Ag.

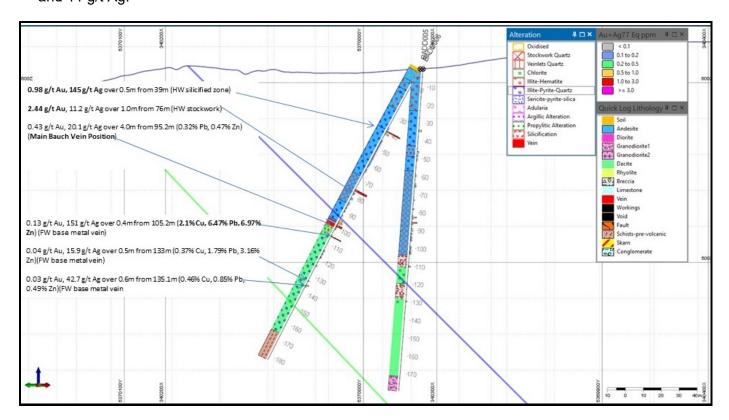


Cross section through the LANF structure. BADD006 visible gold occurred at 76.0m in a hanging wall stockwork within the LANF.

Prospech Managing Director Jason Beckton comments:


"The drill results confirm that we have intercepted the top of a shoot and further drilling will define its dimensions. As can be seen from the map below, there are 21 kilometres of surface trace of the LANF on Prospech's Hodrusa Hamre exploration licence, providing a 29 km² target area for exploration and discovery.

Currently we are modelling a drill target review of the entire caldera to confirm the order of drilling from March onwards.

We look forward to announcing further results when drilling recommences following the northern hemisphere winter."

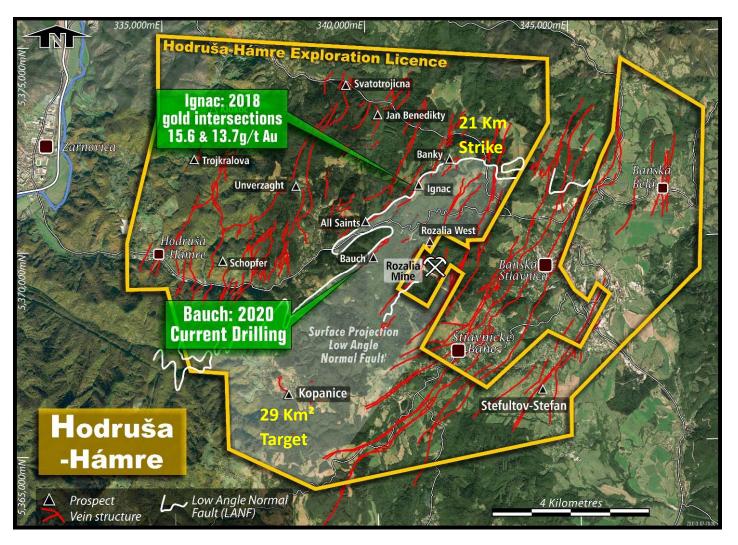

Hodrusa Hamre exploration licence showing the LANF surface projection and prospects.

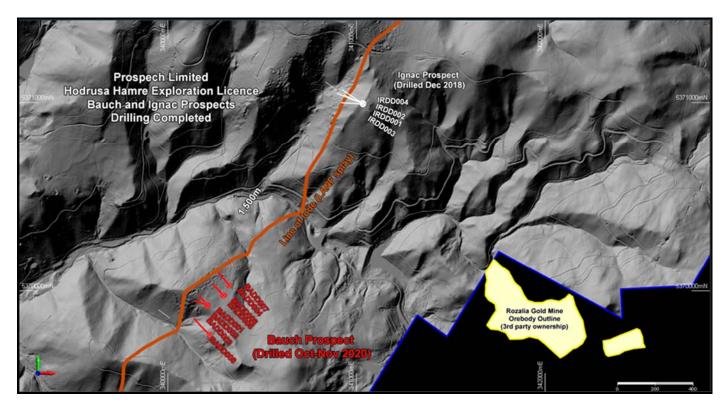

Locations of the Bauch prospect drilling relative to the nearby operating Rozalia Mine and along the line of lode to the Company's successful Ignac prospect drilling in 2018.

This announcement has been approved by the Managing Director, Jason Beckton.

### For further information, please contact:

Jason Beckton Managing Director Prospech Limited +61 (0)438 888 612

#### **Competent Person's Statement**

The information in this Report that relates to Exploration Results, Exploration Targets and Mineral Resources is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

pjn10672

### JORC Code, 2012 Edition – Table 1 Bauch Prospect Drilling

# **Section 1 Sampling Techniques and Data**

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules)</li> </ul>	<ul> <li>Rock chip grab samples were collected from outcrops, spoil heaps and accessible surface and underground workings of quartz veins, and zones of silicification, within Neogene volcanics under the supervision of a qualified geologist.</li> <li>Sample locations were surveyed with a handheld GPS and marked into sample books.</li> </ul>
Drilling techniques	<ul> <li>may warrant disclosure of detailed information.</li> <li>Drill type (eg core, reverse circulation, openhole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, facesampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	Diamond drilling HQ3 size triple tube.
Drill sample recovery	<ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul> <li>Core is measure in the triple tube split before laying in the core boxes to ensure minimum disturbance and most accurate calculation of core recoveries.</li> <li>Overall core recoveries have been very high at 98%.</li> <li>Any relationship between core recovery and grade cannot be determined at this time, but due to the high core recovery, bias is considered very unlikely.</li> </ul>
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.  Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.  The total length and percentage of the relevant intersections logged.	The complete core is logged in detail by qualified geologists. Core is photographed wet and dry. All core is oriented. Detail structural measurements are collected. Core logging is a combination of qualitative and quantitative information.
Sub-sampling techniques and sample preparation	<ul> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all subsampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul> <li>Approximately 1 to 2 Kg of material from each rock chip was sent to the laboratory for analysis.</li> <li>All sampling done under supervision of a qualified geologist.</li> <li>Core is manually split in to 2 equal halves using a diamond saw. The core is split along the core orientation reference line, where available.</li> <li>Half-core is considered to be a high-quality and very representative method of sample.</li> <li>Sample lengths are nominally 1 metre but vary to honour geological contacts.</li> </ul>
Quality of assay data and laboratory tests	<ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations</li> </ul>	<ul> <li>Samples are stored in a secure location in Companies storage facilities and transported to the ALS laboratory in Romania for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% &lt; 75µm.</li> <li>Pulps are analyzed by ALS Romania using method code ME-ICP61, a 33 element determination using a four acid digestion and 30 gram charge fire assay with AA finish (Au-AA25) for gold. Ore grades are analysed</li> </ul>

Criteria	JORC Code explanation	Commentary
	factors applied and their derivation, etc.  Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	<ul> <li>by OG62 – 4 acid digestion method for each element when identified.</li> <li>Where Au repeatability is observed or where visible gold is observed, check assays are performed using the Screen Fire Assay technique.</li> <li>Standards and blanks are included with each batch of drill core samples.</li> <li>At this stage of the project, field duplicates and external laboratory checks are not employed in order to manage costs. Should a prospect advance to the resource estimation stage, this procedure will be reviewed.</li> </ul>
Verification of sampling and assaying	<ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul> <li>Laboratory provides assay certificates, which are stored electronically both in ALS and Company's servers.</li> <li>Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key.</li> <li>No adjustments made to assay data.</li> </ul>
Location of data points	<ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul> <li>Rock chip samples are located using handheld GPS receivers with accuracy from 10-5m.</li> <li>UTM projection WGS84 Zone 34N and local grid SJTSK03. Conversion between local and UTM grid is run through national certified web portal.</li> <li>The topographic control, using handheld GPS, was adequate for the survey.</li> <li>Drill collars are surveyed using a differential GPS or by triangulation depending of the tree cover and other environmental factors.</li> <li>Downhole surveys are taken at nominal 50m intervals down the hole. Excessive deviation is not generally a problem in this field and this interval is considered sufficient. Downhole azimuth readings at magnetic and converted to Grid by adding 6.6 degrees.</li> </ul>
Data spacing and distribution	<ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	It is not yet determined whether the results from this drilling will be used in a mineral resource estimate.
Orientation of data in relation to geological structure	<ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>	<ul> <li>No bias is believed to be introduced by the sampling method.</li> <li>Drilling is designed to intersect the target structure as close to normal as is possible given the constraints of topography and access. In this program no holes were drilled at acute angles to the target structure.</li> </ul>
Sample security	The measures taken to ensure sample security.	<ul> <li>Samples were delivered to ALS Minerals laboratory in Romania by Prospech trusted contractor and were not left unattended at any time. There were no incident reports from ALS lab on sample receiver cell.</li> </ul>
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	<ul> <li>No audits or reviews of the data management system have been carried out.</li> </ul>

# **Section 2 Reporting of Exploration Results**

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</li> </ul>	<ul> <li>Prospech Limited, through subsidiaries and contractual rights, holds 100% rights on the Hodrusa-Hamre - Banska Stiavnica, Nova Bana, Rudno, Pukanec and Jasenie tenements.</li> <li>The laws of Slovakia relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Slovakian mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospech's environmental and permit advisors specifically engaged for such purposes.</li> <li>The Company is the manager of operations in accordance with generally accepted mining industry standards and practices.</li> </ul>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul> <li>Anciently, the target was silver, the currency of the day, and more recently, during the Communist era, the targets were industrial base metals, copper, lead, zinc and others. As a result, much of the country, including the Company's exploration license areas, has not been subject to modern western exploration methodology or exploitation.</li> <li>Slovakia has a known mining history dating to Celtic times and earlier. Tools used by prehistoric miners at Spania Dolina, near Banska Bystrica are dated as early as 2000-1700 BC. Major production of metals (primarily copper and silver) occurred during the medieval period. The second oldest mining institute in the world is located at Banska Stiavnica and the local population is proud of their mining heritage, holding a three day mining festival every year. The mint at nearby Kremnica has operated for over six hundred years and continues to operate today.</li> <li>Communist era base metal and coal production was substantial and smelting of aluminium and nickel (material imported from Hungary and Albania) was carried out. Coal, gold, silver, talc, anhydrite and magnesite (and limestone, dolomite and gravel), bentonite, zeolite and industrial minerals are being mined in Slovakia today. An underground gold mine on a third party mining lease enclosed within the HHBS exploration license, the Rozalia Mine, continues in operation today, trucking a gravity/flotation concentrate to a smelter in Belgium.</li> <li>Communist era gold assays used in Government and private exploration programs have been proven to be unreliable and this must be taken into account when interpreting reports from the Communist era.</li> <li>Prospech holds 100% of two exploration licences covering approximately 115 square kilometres in the Hodrusa-Hamre/Banska Stiavnica mining district and the nearby Nova Bana goldfield where more than 1,000 years of historical production is estimated to have totalled 2.4 million ounces of 2inc, 55,000 tonnes of lead and 8,000 tonnes of copper.</li> <li>The Hodr</li></ul>
Geology	<ul> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	Located on the western flanks of the Stiavnica Strato Volcano within the Central Slovakian Volcanic Belt, the Nova Bana Exploration Licence covers quartz veins with classically banded, low-sulphidation epithermal textures with sulphidic "ginguro" zones, which are commonly associated with high grades of precious metals. Native gold and silver-sulphide minerals were observed in the hand specimens.

Criteria	JORC Code explanation		Commentary							
Drill hole	A summary of all information material to the	Hole_ID U	UTM_Grid_ID	UTM_East	UTM_North	RL	Max_Dept			
nformation	understanding of the exploration results	BADD001 V	WGS 84 Zone 34N	340,210.03	5,369,923.62	625.70	143.			
	including a tabulation of the following		WGS 84 Zone 34N		5,369,923.16	625.74	191.			
	information for all Material drill holes:		WGS 84 Zone 34N				137.			
	easting and northing of the drill hole collar		WGS 84 Zone 34N			607.50	78			
	elevation or RL (Reduced Level – elevation)		WGS 84 Zone 34N	-	5,369,975.16	607.57	179			
	above sea level in metres) of the drill hole		WGS 84 Zone 34N			607.41	182			
	collar		WGS 84 Zone 34N WGS 84 Zone 34N			597.57 625.86	200 239			
	dip and azimuth of the hole	BADD008 V	WG3 64 ZOITE 34IN	340,221.23	3,303,707.33	023.80	233			
	o down hole length and interception depth									
	o hole length.									
	<ul> <li>If the exclusion of this information is justified on</li> </ul>	Hole_ID Depth Dip		MAG_Azimuth UTM_Azimuth			Tool			
	the basis that the information is not Material	BADD001	0.00 -60.00		83.00		Compass			
	and this exclusion does not detract from the	BADD001	15.00 -59.49		84.95		Nomad			
		BADD001	50.00 -60.26		82.94		Nomad			
	understanding of the report, the Competent	BADD001	100.00 -60.39		81.91		Nomad			
	Person should clearly explain why this is the	BADD001	142.00 -60.92		80.14		Nomad			
	case.	BADD002	0.00 -85.95		86.30		Nomad			
		BADD002	15.00 -85.95		86.30	292.90	Nomad			
		BADD002	22.00 -85.60	2	92.67	299.27	Nomad			
		BADD002	34.00 -86.03	1 2	93.61	300.21	Nomad			
		BADD002	46.00 -86.02	2 2	93.15	299.75	Nomad			
		BADD002	50.00 -85.95	5 2	94.20	300.80	Nomad			
		BADD002	53.00 -86.03	1 2	93.80	300.40	Nomad			
		BADD002	58.00 -85.60	2	90.39	296.99	Nomad			
		BADD002	70.00 -85.37	7 2	91.68	298.28	Nomad			
		BADD002	82.00 -85.38	3 2	90.97	297.57	Nomad			
		BADD002	94.00 -85.37	7 2	99.08	305.68	Nomad			
		BADD002	100.00 -85.43	3 2	95.18	301.78	Nomad			
		BADD002	106.00 -85.53	1 2	97.57	304.17	Nomad			
		BADD002	118.00 -85.32	2 3	00.55	307.15	Nomad			
		BADD002	130.00 -85.09	3	00.67	307.27	Nomad			
		BADD002	142.00 -85.12	2 2	96.42	303.02	Nomad			
		BADD002	150.00 -85.35	3	01.43	308.03	Nomad			
		BADD002	154.00 -85.43	3 2	97.11	303.71	Nomad			
		BADD002	166.00 -85.49		03.63		Nomad			
		BADD002	178.00 -85.19		98.82		Nomad			
		BADD002	190.00 -85.36		01.21		Nomad			
		BADD003	0.00 -60.00		11.00		Compass			
		BADD003	12.00 -60.2		11.72		Nomad			
		BADD003	18.00 -60.23		11.70		Nomad			
		BADD003	29.00 -60.50		11.16		Nomad			
		BADD003	41.00 -60.04		11.28		Nomad			
		BADD003	50.00 -59.70		11.90		Nomad			
		BADD003	53.00 -60.04		12.28		Nomad			
		BADD003	65.00 -59.72		11.52		Nomad			
		BADD003	77.00 -59.17		11.85		Nomad			
		BADD003	89.00 -58.98		11.60		Nomad			
		BADD003	100.00 -58.38		12.26		Nomad			
		BADDO03	101.00 -58.63		11.59		Nomad			
		BADD003	113.00 -58.63							
					12.26		Nomad			
		BADD003	125.00 -57.99		12.31	318.91	Nomad			
					10.01					

312.31

BADD003 137.00 -57.69

318.91 Nomad

Criteria	JORC Code explanation	Commentary					
		Hole_ID	Depth	Dip	MAG_Azimuth	UTM_Azimuth	Tool
		BADD004	0.00	-60.00	312.88	319.48	Nomad
		BADD004	30.00	-61.06	312.88	319.48	Nomad
		BADD004	50.00	-60.61	314.40	321.00	Nomad
		BADD005	0.00	-86.00	320.00	326.60	
		BADD005	15.00	-86.10	320.89	327.49	Nomad
		BADD005	35.00	-85.84	320.75	327.35	Nomad
		BADD005	47.00	-85.43	321.22	327.82	Nomad
		BADD005	50.00	-85.60	323.26	329.86	Nomad
		BADD005	59.00	-85.58	322.70	329.30	Nomad
		BADD005	71.00	-85.49	321.73	328.33	Nomad
		BADD005	83.00	-85.58	318.95	325.55	Nomad
		BADD005	95.00	-85.70	324.03	330.63	Nomad
		BADD005	100.00	-85.88	323.68	330.28	Nomad
		BADD005	107.00	-85.37	323.93	330.53	Nomad
		BADD005	119.00	-85.74	320.90	327.50	Nomad
		BADD005	131.00	-85.36	323.77	330.37	Nomad
		BADD005	143.00	-85.34	323.70	330.30	Nomad
		BADD005	150.00	-85.67	326.10	332.70	Nomad
		BADD005	155.00	-85.33	324.78	331.38	Nomad
		BADD005	167.00	-85.43	326.90	333.50	Nomad
		BADD005	179.00	-85.25	324.54	331.14	Nomad
		BADD006	0.00	-61.31	310.67	317.27	Nomad
		BADD006	15.00	-61.31	310.67	317.27	Nomad
		BADD006	50.00	-61.73	310.77	317.37	Nomad
		BADD006	100.00	-62.60	309.82	316.42	Nomad
		BADD006	150.00	-62.85	309.81	316.41	Nomad
		BADD006	180.00	-63.18	309.12	315.72	Nomad
		BADD007	0.00	-61.02	317.26	323.86	
		BADD007	23.00	-61.02	317.26	323.86	Nomad
		BADD007	50.00	-61.71	313.95	320.55	Nomad
		BADD007	100.00		313.74		Nomad
		BADD007	150.00	-62.23	313.89	320.49	Nomad
		BADD007	200.00	-61.69	314.84	321.44	Nomad
		BADD008	0.00	-60.77	307.65	314.25	
		BADD008		-60.77	307.65	314.25	Nomad
		BADD008	50.00	-60.18	307.76	314.36	Devishot
		BADD008	100.00		308.80		Devishot
		BADD008	150.00		310.80		Devishot
		BADD008	200.00		311.48		Devishot
		<u>,                                      </u>					

# Data aggregation methods

- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.
- Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.
- The assumptions used for any reporting of metal equivalent values should be clearly stated.
- No weighted averages reported as equal length intervals of 0.5m sampled and results have been reported with aggregated intercepts.

#### Relationship between mineralisation widths and intercept lengths

- These relationships are particularly important in the reporting of Exploration Results.
- If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.
- If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').
- BADD001 intersected 1m at 12.8 g/t Au and 380 g/t Ag from 89.1m downhole with true width >98% of the drilled width. Drilling designed to intercept target at orthogonal angle to report nominal true width. Individual assay results for all samples with anomalous Au or Ag are tabled below

Criteria	JORC Code explanation				Comn	nentary	/			
		HOLE ID	FROM	то	LENGTH	Au	Ag	Cu	Pb	Zn
		BADD001	m 25	m 26	m 1	g/t 0.08	g/t 9.3	ppm 31	ppm 46	ppm 92
		BADD001	33		÷		1		27	112
		BADD001 BADD001	42 50.8				0.9 10.7		24 291	131 214
		BADD001	89.1 89.6			17.2 8.47	494 266		21700 24200	11450 16550
		BADD001 BADD002	89.0 49.5				=		6460	5310
		BADD002 BADD002	52 70		ļ		10.4 1.1	30 16	575 27	469 142
		BADD002	80				1.1		20	102
		BADD002 BADD002	83.3 114.5				17.2 7.3	972 622	26400 1075	24000 2310
		BADD002	115				4.2		400	1500
		BADD002 BADD002	115.5 116				8.5 41.7		2600 13650	8800 24900
		BADD002	121			0.1	8.5		68	333
		BADD003 BADD003	26 28				18.5 24		29 57	47 92
		BADD003	29	30	1	0.08	13.2	155	428	930
		BADD003 BADD003	41 42	·!·····			14.3 11.7	63 70	74 716	190 175
		BADD003	51				39		546	384
		BADD003 BADD003	72 88				46.8 14.6	714 33	901 376	397 892
		BADD003	88.8				74.1	2730	3050	7410
		BADD003 BADD003	101.3 110.3				40.2 26.4	20800 2150	3670 26700	3790 44400
		BADD003	130				12.3	878	3180	7090
		HOLE ID	FROM	то	LENGTH	Au a/t	Ag	Cu	Pb	Zn
		BADD005	<b>m</b> 64	<b>m</b> 65	m 1	g/t 0.21	<b>g/t</b> 0.5	ppm 38	ppm 23	<b>ppm</b> 109
		BADD005 BADD005	65 78	66 78 5	1 0.5	0.26 0.21	0.25 0.25	\$	52 33	223 245
		BADD005	78 82.5	78.5 83	0.5	0.21 0.76	3.4		33 68	245 208
		BADD005	83.5	84	0.5	0.27	0.5	15	21	99
		BADD005 BADD005	85.5 90	86 90.5	0.5 0.5		0.5 0.25		31 23	131 88
		BADD005	95.5	96	0.5	0.27	0.25	9	76	247
		BADD005 BADD005	99 100.5	99.5 101	0.5 0.5	0.24 0.21	1.4 0.5	·	266 124	376 229
		BADD005	102.5	103	0.5	0.24	0.5	56	41	172
		BADD005 BADD006	110 39	110.5 39.5	0.5 0.5	0.28 0.98	8 145	·	1350 401	3950 679
		BADD006	39.5	39.5 40.5	0.5 1		4.4	ļ	401 26	679 103
		BADDO06	40.5	41.2	0.7	0.39	28.9	åi	238	496 120
		BADD006 BADD006	58 59	59 60	1 1		7.1 5.7	·	7 16	129 126
		BADD006	76	77	1	2.29	11.2	91	45	154
		BADD006 BADD006	81.2 84	82.2 85	1 1	0.25 0.15	10.7 7.1	\$	58 642	47 692
		BADD006	95.2	96.4	1.2	0.29	27.5	144	166	450
		BADD006 BADD006	96.4 98.2	97.2 99.2	0.8 1		24.2		876 5380	13600 6780
		BADD006	100	101	1	0.14	5.2	207	1300	1820
		BADD006 BADD006	104.8 105.2	105.2 105.6	0.4 0.4	0.27 0.14	1.9 151	<u> </u>	253 64700	932 <b>697</b> 00
		BADD006	123.5	124	0.5	0.01	14.3			16600
		BADD006 BADD006	133 135.5	133.5 136.1	0.5 0.6		15.9 42.7	3740 4570	17900 8490	
		[	FROM	то	LENGTH	Au	Ag	Cu	Pb	Zn
		HOLE ID	m 67	m co	m 1	g/t	g/t	ppm	ppm	ppm 706
		BADD007 BADD007	67 68	68 69	1 1		6.7 4.7	43 44	305 137	706 330
		BADD007	86	87	1	0.05	30.3	1545	8110	7830
		BADD007 BADD007	150 151	151 152	1 1	0.06 0.06	25.5 69.9	3380 6630	31600 68800	31500 54300
		BADD007	169	170	1	0.84	9.6	1155	2970	5190
		BADD008 BADD008	42 43	43 44	1 1	0.18 0.31	1.4 1.2		37 174	80 268
		BADD008	44	45	1	0.19	0.6	28	10	97
		BADD008 BADD008	45 95	46 96	1 1	0.3 0.22	1 14.9		12 235	108 38
		BADD008	184	185	1	0.21	7	752	614	1380
		BADD008 BADD008	185 187	186.2 188	1.2 1	0.21 0.25	6.5 5.2	837 547	189 122	329 261
		BADD008	190.5		0.8	0.08	11.7	1360	2980	6360
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	dril	l-core s	sample	s are d	isplaye	d in th	both ro e attacl Zone 3	hed ma	
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	<ul> <li>Results for all mineralised samples collected in this program are displayed on the attached maps and/or tables.</li> </ul>								
Other substantive	Other exploration data, if meaningful and	• No	metall	urgical	or bulk	densit	y tests	were c	conduct	ted at
	,			الماح ال	•		,			

Criteria	JORC Code explanation	Commentary
exploration data	material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	the project by Prospech.
Further work	<ul> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul> <li>Prospech is in the processing of submitting samples of the remaining drill core for analysis. Depending of the results, further drilling may be carried out at Bauch.</li> </ul>