

23 August 2021

SECOND RIG COMMENCES DRILLING ANTON VEIN TARGETS

- Two rigs are now drilling the Company's Central Slovakian epithermal gold-silver systems.
- Rig 1 has completed a total of 4 of 6 planned drill holes at Krakauer:
 - o All completed holes have intersected the epithermal vein in the target zone.
 - o Assay results have been received and reported for 2 holes.
 - Assays results for the remaining 2 completed holes are pending.
- Rig 2 to drill 6 holes on the never-before-drilled Anton vein system:
 - o Target strike length exceeds 3.5 kilometres.
 - o 57 historical mine spoil rock-chip samples average 3.25 g/t Au and 214 g/t Ag.
 - o Peak assays of 52.6 g/t Au and 1,445 g/t Ag.


The Directors are pleased to announce that a second diamond drill rig has commenced operations on Prospech Limited's ('Prospech' or 'the Company') (ASX: PRS) Central Slovakian gold and silver prospects.

Rig 1 is currently drilling the Krakauer epithermal vein system located in the Company's 100% owned Nova Bana exploration licence and Rig 2 will initially explore the never-before-drilled Anton prospect, located within the Company's 100% owned Hodrusa Hamre gold-silver exploration licence.


Anton has been a substantial historic producer of gold and silver from epithermal quartz veins and has a strike length greater than 3.5 kilometres.

Historical mining at Anton was focused primarily on production of high-grade gold and silver ore from near surface parts of a low sulphidation epithermal system near Vyhne village. The production was hampered by high inflow of ground water which was the main limiting factor preventing the mines from progressing to greater depths. All the attempts to produce from below the drainage level at 369mRL (Kreuzerfindung) were unsuccessful due to primitive water pumping machinery which often broke down or did not have enough water supply to power the pump engines. Consequently, mining ceased in the 1890s.


The initial 3 drill holes will test a section of the vein system below the level of the historical mining. A further 3 holes in Phase 1 is planed further along strike to the south.

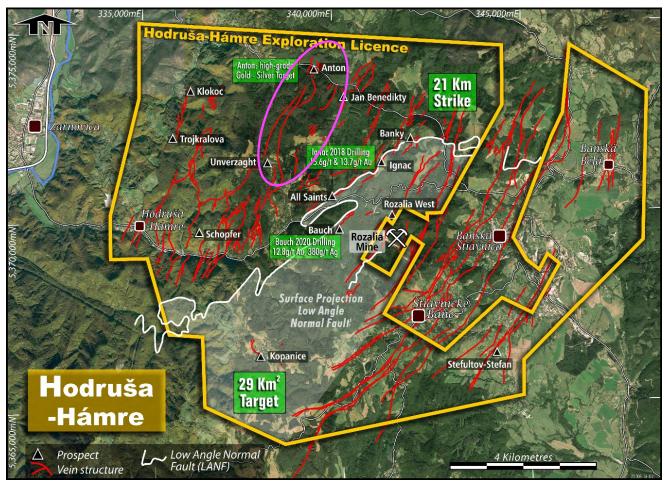

Location of the 3.5 km Anton gold-silver vein structure (mauve highlight) in the northern portion of the Hodrusa-Hamre exploration licence

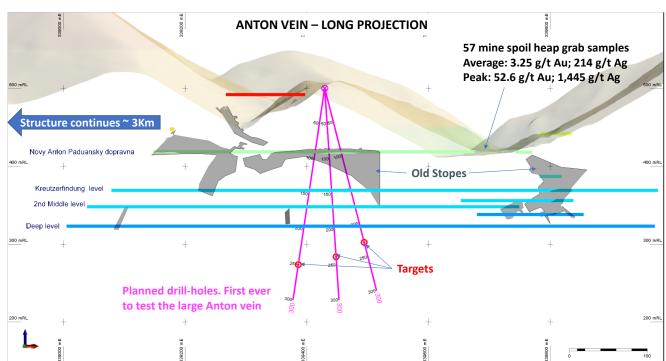

Longitudinal projection of the northern part of the Anton Vein system. The first 3 holes drilled by Prospech will explore the structure beneath the old mine workings at 369mRL (horizontal lines).

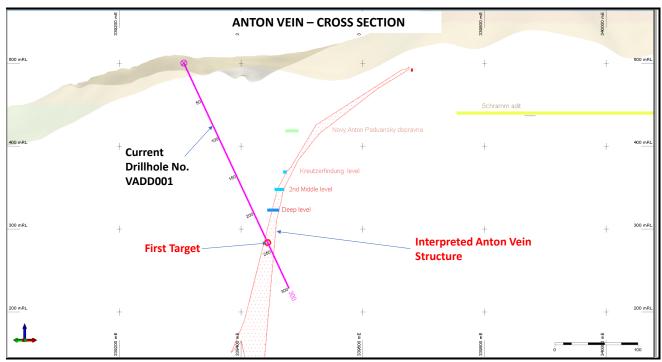

Cross section of the first ever exploration hole to test the extensive Anton vein system.

Prospech Managing Director Jason Beckton comments:

"Prospech have been fortunate to secure a second drill rig, overcoming challenging COVID-19 border restrictions and global competition for drilling services.

Prospech geologists collected 57 rock chip samples from historic Anton Mine spoil heaps. These grab samples averaged 3.25 g/t Au and 214 g/t Ag with peak values of 52.6 g/t Au and 1,445 g/t Ag, giving an indication of the grade potential of the Anton vein system. Prospech is targeting sections of the Anton vein system where the old-timers were prevented from mining by ground water challenges exacerbated by primitive pumping equipment.

Rig 1 continues drilling at the Krakauer vein on the Nova Bana Project licence area. To date, 4 holes have been completed and 2 more holes are planned in the current program. The last 2 completed holes, KVDD003 and KVDD004, both intersected epithermal quartz veins in the target zone and assays are awaited."

This announcement has been approved by the Managing Director, Jason Beckton.

For further information, please contact:

Jason Beckton Managing Director Prospech Limited +61 (0)438 888 612

Competent Person's Statement

The information in this Report that relates to Exploration Results is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

pjn10920

JORC Code, 2012 Edition – Table 1 Anton, Hodrusa

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 Rock chip grab samples were collected from outcrops, spoil heaps and accessible surface and underground workings of quartz veins, and zones of silicification, within Neogene volcanics under the supervision of a qualified geologist. Sample locations were surveyed with a handheld GPS and marked into sample books.
Drilling techniques	Drill type (eg core, reverse circulation, openhole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, facesampling bit or other type, whether core is oriented and if so, by what method, etc).	Anton prospect has not been drilled.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	Anton prospect has not been drilled previously.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant 	Rock chips were described in hand specimen and photographs taken for reference.
Sub-sampling techniques and sample preparation	 intersections logged. If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all subsampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	 Approximately 1 to 2 Kg of material from each rock chip was sent to the laboratory for analysis. All sampling done under supervision of a qualified geologist.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld 	 Samples are stored in a secure location in Companies storage facilities and transported to the ALS laboratory in Romania for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% < 75µm. Pulps are analyzed by ALS Romania using method

Criteria	JORC Code explanation	Commentary	
	XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	code ME-ICP61, a 33 element determination using a four acid digestion and 30 gram charge fire assay with AA finish (Au-AA25) for gold. Ore grades are analysed by OG62 – 4 acid digestion method for each element when identified.	
Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 Laboratory provides assay certificates, which are stored electronically both in ALS and Company's servers. Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key. No adjustments made to assay data. 	
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 Rock chip samples are located using handheld GPS receivers with accuracy from 10-5m. UTM projection WGS84 Zone 34N and local grid SJTSK03. Conversion between local and UTM grid run through national certified webportal. The topographic control, using handheld GPS, was adequate for the survey. The location and gold-silver assay results for all 57 samples are reported below: 	
		UTM_East UTM_North Type Description Ag_ppm Au_ppm	
		339670 5373947 Mullock Sach qz. Trace py/gal dissem. Younger carb veir 697 52.60 339670 5373947 Mullock Banded qz. Trace py/gal. 1445 8.37	
		339670 5373947 Mullock Sach carb. Trace py/gal/ Ag-sulp? 854 14.35	
		339670 5373947 Mullock Qx. Trace gal/py/Ag?sulph 820 10.00 339670 5373947 Mullock Qx/vuggy. Trace py. 722 9.83	
		339640 5373933 Mullock Vuggy Qz/Carb. Trace Py+Ag? Sulph. 1105 4.0	
		339670 5373947 Mullock Sach. qz+carb. Trace gal/ccp 413 8.4	
		339670 5373947 Mullock Sach. qz. Trace py/gal. 265 8.0 339670 5373947 Mullock Coarse grained carb. + qz veinlets. Trace py/gal 525 4.5	
		339640 5373933 Mullock Vuggy sach. Qz 333 6.58	
		339670 5373947 Mullock Qz stockwork. Trace py. 379 5.77	
		339640 5373933 Mullock Massive fine grained Qz. Ccp dissem. 582 2.34 339640 5373933 Mullock Vuggy sach. Qz. Fe-ox. 320 5.08	
		339670 5373947 Mullock Sach. qz. Trace py/gal. 416 3.32	
		339640 5373933 Mullock Sach. Qz. Trace Sph/Gal/Ccp/Py. 494 2.27	
		339670 5373947 Mullock Sach. vuggy qz. Trace py/gal. 173 5.11 339670 5373947 Mullock Sach qz. Trace py/gal/Ag?sulph 343 2.20	
		339640 5373933 Mullock Vuggy sach. Qz. Trace Py/Gal/Ccp 243 3.49	
		339640 5373933 Mullock Sach Qz. Trace Py. 243 3.17 339670 5373947 Mullock Sach qz + carb. Trace py/gal. 190 3.75	
		339670 5373947 Mullock Sach qz + carb. Trace py/gal. 190 3.75 339670 5373947 Mullock Coarse grained carb. Trace Ag? sulph 231 2.99	
		339670 5373947 Mullock Sach qz veinlets. Trace py/ccp 109 4.33	
		339640 5373933 Mullock Massive to vuggy sach. White Qz. Carb xx in vug 180 2.34 339670 5373947 Mullock Sach qz. Trace gal/py. 193 0.83	
		339670 5373947 Mullock Sach qz. Trace gal/py. 193 0.83 339670 5373947 Mullock Sach. qz +- adularia 116 1.63	
		339640 5373933 Float Massive white sach. Qz. Trace Py dissem. 96 0.57	
		339670 5373947 Mullock Massive sach qz. Trace Ag?sulph. 95 0.46 339640 5373933 Mullock Quartz/Carb breccia. Trace Py dissem 61 0.74	
		339640 5373933 Mullock Quartz/Carb breccia. Trace Py dissem 61 0.74 339670 5373947 Mullock Qz veinlets. 84 0.39	
		339670 5373947 Mullock Vuggy sach qz. Trace Ag-sulp? 32 0.95	
		339670 5373947 Mullock Sach qz. Trace py + carb. 41 0.54 339670 5373947 Mullock Drusy qz veinlets. 11 0.88	
		339670 5373947 Mullock Brusy qz Verifiets. 11 0.86 339670 5373947 Mullock Sach qz. Trace ccp/gal 23 0.65	
		339670 5373947 Mullock Vuggy/drusy qx. Trace py 29 0.5:	
		339670 5373947 Mullock Sach. qz. Trace gal/py/ccp. 22 0.57 339640 5373933 Mullock Massive fine grained grey Qz. Trace Py dissem 27 0.43	
		339670 5373947 Mullock Banded qz. Trace py/gal. 27 0.40	
		339670 5373947 Mullock Sach. qz + carb. trace py. 35 0.25 339640 5373933 Mullock Zonal Qz vein. Massive fine grained grey Qz/vu 33 0.27	
		339670 5373947 Mullock Qx. Trace ccp/gal. 30 0.29	
		339670 5373947 Mullock Grey collomorph. qz. 23 0.31	
		339670 5373947 Mullock Carb bx + qz. 2 0.48 339670 5373947 Mullock Carb bx. 16 0.27	
		339670 5373947 Mullock Trace py 24 0.08	
		339670 5373947 Mullock Driusy qz stockwork. Trace ccp. 14 0.14 339670 5373947 Mullock Qx. Trace py. 9 0.16	
		339670 5373947 Mullock Qx 7 0.14	
		339670 5373947 Mullock Sach/vuggy qz. 7 0.11	
		339640 5373933 Mullock Massive fine grained greyy Qz. Carb xx in vugs. 8 0.06 339670 5373947 Mullock Qz stockwork/vuggy. 6 0.06	
		339670 5373947 Mullock Qz stockwork 7 0.04	
		339670 5373947 Mullock Sach/drusy qz + carb. 3 0.06 339670 5373947 Mullock Qz veinlets. Trace py. 2 0.08	
		339670 5373947 Mullock Qz verifiets. Trace py. 2 0.00 339670 5373947 Mullock Qz stockwork. Trace py. 2 0.07	
		339670 5373947 Mullock Sach/drusy (leached) qz + malachite. 4 0.04 339670 5373947 Mullock Vuggy sach. qz/qx. 3 0.03	
		339670 5373947 Mullock Massive/drusy qz. 3 0.01	
Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 Reconnaissance sampling of available outcrop. Results will not be used for resource estimation. No compositing has been applied. 	

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	 Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	No bias is believed to be introduced by the sampling method.
Sample security	The measures taken to ensure sample security.	 Samples were delivered to ALS Minerals laboratory in Romania by Prospech trusted contractor and were not left unattended at any time. There were no incident reports from ALS lab on sample receiver cell.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 No audits or reviews of the data management system have been carried out.

Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.	 Prospech Limited, through subsidiaries and contractual rights, holds 100% rights on the Hodrusa-Hamre - Banska Stiavnica, Nova Bana, Rudno, Pukanec and Jasenie tenements. The laws of Slovakia relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Slovakian mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospech's environmental and permit advisors specifically engaged for such purposes. The Company is the manager of operations in accordance with generally accepted mining industry standards and practices.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 Anciently, the target was silver, the currency of the day, and more recently, during the Communist era, the targets were industrial base metals, copper, lead, zinc and others. As a result, much of the country, including the Company's exploration license areas, has not been subject to modern western exploration methodology or exploitation. Slovakia has a known mining history dating to Celtic times and earlier. Tools used by prehistoric miners at Spania Dolina, near Banska Bystrica are dated as early as 2000-1700 BC. Major production of metals (primarily copper and silver) occurred during the medieval period. The second oldest mining institute in the world is located at Banska Stiavnica and the local population is proud of their mining heritage, holding a three day mining festival every year. The mint at nearby Kremnica has operated for over six hundred years and continues to operate today. Communist era base metal and coal production was substantial and smelting of aluminium and nickel (material imported from Hungary and Albania) was carried out. Coal, gold, silver, talc, anhydrite and magnesite (and limestone, dolomite and gravel), bentonite, zeolite and industrial minerals are being mined in Slovakia today. An underground gold mine on a third party mining lease enclosed within the HHBS exploration license, the Rozalia Mine, continues in operation today, trucking a gravity/flotation concentrate to a smelter in Belgium. Communist era gold assays used in Government and private exploration programs have been proven to be unreliable and this must be taken into account when interpreting reports from the Communist era. Prospech holds 100% of two exploration licences covering approximately 115 square kilometres in the Hodrusa-Hamre/Banska Stiavnica mining district and the nearby Nova Bana goldfield where more than 1,000 years of historical production is estimated to have totalled 2.4 million ounces of gold, 120 million ounces of silver, 70,000 tonnes of zinc, 55,000 tonnes

Criteria	JORC Code explanation	Commentary
		 8,000 tonnes of copper. The Hodrusa-Hamre/Banska Stiavnica mining district and the Nova Bana goldfield are located approximately 180 kilometres east of Bratislava in Slovakia, a country member of the European Union and Eurozone.
Geology	Deposit type, geological setting and style of mineralisation.	 Located on the western flanks of the Stiavnica Strato Volcano within the Central Slovakian Volcanic Belt, the Nova Bana Exploration Licence covers quartz veins with classically banded, low-sulphidation epithermal textures with sulphidic "ginguro" zones, which are commonly associated with high grades of precious metals. Native gold and silver-sulphide minerals were observed in the hand specimens.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	Anton Vein has not been drilled.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	No results have been reported with aggregated intercepts.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	Mineralisation is epithermal vein related.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	The location and results received for both rock chip and drill-core samples are displayed in the attached maps and/or tables. Coordinates are UTM Zone 34N.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Results for all samples collected in this program are displayed on the attached maps and/or tables.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No metallurgical or bulk density tests were conducted at the project by Prospech.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).	Prospech proposes to carry out additional surface sampling and mapping of the Anton vein in preparation

Criteria	JORC Code explanation	Commentary
	 Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	for diamond drilling early in the 2021 field season.