


30 June 2022

# FINAL DRILLING RESULTS - ZEMPLIN SILVER - PHASE 2

- Zemplin Phase 2 drilling has completed six holes for 2,050 metres with results up to 0.5m @ 516 g/t Ag
- Tested strike and depth potential of previously discovered, high-grade mineralisation (up to 1,220 g/t silver)
- Results now reported for holes CZDD007 to CZDD010

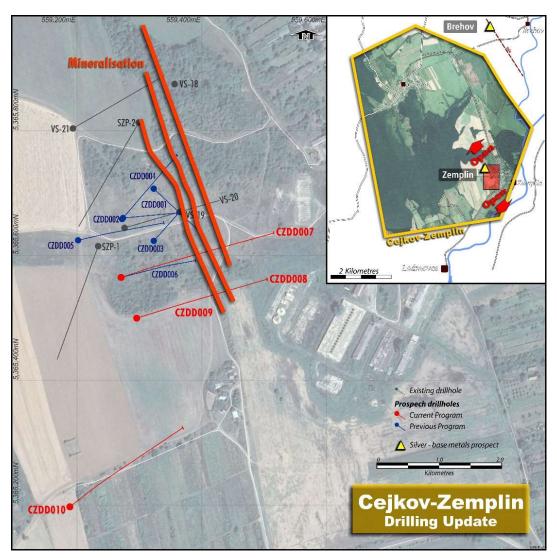

Drilling was designed to test the strike and depth potential of a fully preserved silver and base metal mineralised system.

The Directors of Prospech Limited ('Prospech' or 'the Company') (ASX: PRS) are pleased to advise that Phase 2 drilling has been completed at the Zemplin silver-lead-zinc prospect within the Cejkov-Zemplin exploration licence, located in the Eastern Slovakian neovolcanic belt.


Level 2, 66 Hunter Street, Sydney NSW 2000 Australia T: +61 2 9300 3333 F: +61 2 9221 6333 E: info@prospech.com.au This program follows Prospech drilling in April 2021, which intersected over 40 epithermal veins hosted within zones of hydrothermally altered volcanics. The Zemplin structure consists of parallel zones which remain open to the northwest and southeast. The main silver zone is now interpreted as being a narrow series of parallel structures.

Results from the Phase 2 drilling include:

 CZDD007: 0.5m @ 98 g/t Ag from 103.5m 0.5m @ 191 g/t Ag from 171.0m
 CZDD008: 1.0m @ 21 g/t Ag from 269.0m 5.0m @ 7 g/t Ag and 0.31 g/t Au from 285.0m
 CZDD009: 1.0m @ 42 g/t Ag from 180.8m 0.5m @ 516 g/t Ag and 0.74 g/t Au from 180.8m 0.5m @ 23 g/t Ag and 1.35 g/t Au from 194.0m
 CZDD010: 1.0m @ 34 g/t Ag and 0.17 g/t Au from 140.0m

Previously reported results from the Phase 1 drilling at Zemplin include:

•	<b>CZDD001:</b> and including	3.0m @ 136 g/t Ag from 59.0m 4.5m @ 147 g/t Ag from 85.3m 2.3m @ 240 g/t Ag from 87.5m
•	CZDD002:	6.0m @ 30 g/t Ag from 111.0m
•	CZDD003:	6.0m @ 117 g/t Ag from 94.0m
	including	1.8m @ 291 g/t Ag from 97.2m
•	CZDD004:	4.4m @ 34 g/t Ag, from 49.6m
	and	4.3m @ 201 g/t Ag from 92.5m
	including	0.5m @ 1,220 g/t Ag from 92.5m
•	CZDD005:	0.35m @ 61 g/t Ag from 93.65m
		1.5m @ 33 g/t Ag from 118m
		1.0m @ 148 g/t Ag and 0.46 g/t Au from 118m
•	CZDD006:	3.0m @ 24 g/t Ag from 140m
		5.0m @ 8 g/t Ag and 0.23 g/t Au from 303m

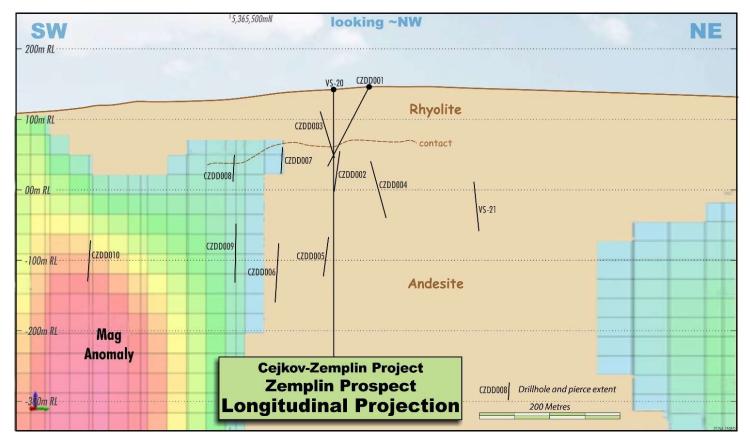

A high grade >500 g/t Ag zone is open, albeit narrow in CZDD009.

Prospech Managing Director Jason Beckton comments:

"An open, high grade zone, albeit narrow, at the Zemplin prospect epithermal vein system has been discovered in CZDD009 which is above the magnetic zone as currently interpreted and partially tested by CZDD010. Further drilling along strike from this high grade zone, to the south west of the Zemplin project, will be evaluated in conjunction with drilling results from the current drilling program at the Hodrusa project."

This announcement has been approved by the Managing Director, Jason Beckton.

## For further information, please contact:

Jason Beckton Managing Director Prospech Limited +61 (0)438 888 612

#### **Competent Person's Statement**

The information in this Report that relates to Exploration Results is based on information compiled by Mr Jason Beckton, who is a Member of the Australian Institute of Geoscientists. Mr Beckton, who is Managing Director of the Company, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Beckton consents to the inclusion in this Report of the matters based on the information in the form and context in which it appears.

pjn11282

# JORC Code, 2012 Edition – Table 1 Zemplin Silver Prospect Drilling

### Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> </ul>	<ul> <li>Rock chip grab samples not reported in this report were collected from outcrops, spoil heaps and accessible surface and underground workings of quartz veins, and zones of silicification, within Neogene volcanics under the supervision of a qualified geologist.</li> <li>Sample locations were surveyed with a handheld GPS and marked into sample books.</li> </ul>
Drilling techniques	<ul> <li>Drill type (eg core, reverse circulation, open- hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	Diamond drilling HQ3 size triple tube.
Drill sample recovery	<ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul> <li>Core is measure in the triple tube split before laying in the core boxes to ensure minimum disturbance and most accurate calculation of core recoveries.</li> <li>Overall core recoveries have been very high at 98%.</li> <li>Any relationship between core recovery and grade cannot be determined at this time, but due to the high core recovery, bias is considered very unlikely.</li> </ul>
Logging	<ul> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc)</li> </ul>	• The complete core is logged in detail by qualified geologists. Core is photographed wet and dry. All core is oriented. Detail structural measurements are collected. Core logging is a combination of qualitative and quantitative information.

Criteria	JORC Code explanation	Commentary
	<ul> <li>photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	
Sub-sampling techniques and sample preparation	<ul> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all subsampling stages to maximise representivity of samples.</li> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul> <li>Approximately 1 to 2 Kg of material from each rock chip was sent to the laboratory for analysis.</li> <li>All sampling done under supervision of a qualified geologist.</li> <li>Core is manually split in to 2 equal halves using a diamond saw. The core is split along the core orientation reference line, where available.</li> <li>Half-core is considered to be a high-quality and very representative method of sample.</li> <li>Sample lengths are nominally 1 metre but vary to honour geological contacts.</li> </ul>
Quality of assay data and laboratory tests	<ul> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>	<ul> <li>Samples are stored in a secure location in Companies storage facilities and transported to the ALS laboratory in Romania for sample preparation of fine crush, riffle split and pulverizing of 1kg to 85% &lt; 75µm.</li> <li>Pulps are analyzed by ALS Romania using method code ME-ICP61, a 33 element determination using a four acid digestion and 30 gram charge fire assay with AA finish (Au-AA25) for gold. Ore grades are analysed by OG62 – 4 acid digestion method for each element when identified.</li> <li>Where Au repeatability is observed or where visible gold is observed, check assays are performed using the Screen Fire Assay technique.</li> <li>Standards and blanks are included with each batch of drill core samples.</li> <li>At this stage of the project, field duplicates and external laboratory checks are not employed in order to manage costs. Should a prospect advance to the resource estimation stage, this procedure will be reviewed.</li> </ul>
Verification of sampling and assaying	<ul> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul> <li>Laboratory provides assay certificates, which are stored electronically both in ALS and Company's servers.</li> <li>Laboratory CSV files are merged with GPS Location data files using unique sample numbers as the key.</li> <li>No adjustments made to assay data.</li> </ul>
Location of data points	<ul> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul> <li>Rock chip samples are located using handheld GPS receivers with accuracy from 10-5m.</li> <li>UTM projection WGS84 Zone 34N and local grid SJTSK03. Conversion between local and UTM grid is run through national certified web portal.</li> <li>The topographic control, using handheld GPS, was adequate for the survey.</li> <li>Drill collars are surveyed using a differential GPS or by triangulation depending of the tree cover and other environmental factors.</li> <li>Downhole surveys are taken at nominal 50m intervals down the hole. Excessive deviation is not generally a problem in this field and this interval is considered sufficient. Downhole azimuth readings at magnetic and converted to Grid by adding 6.6 degrees.</li> </ul>
Data spacing and distribution	<ul> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul> <li>It is not yet determined whether the results from this drilling will be used in a mineral resource estimate.</li> </ul>
Orientation of data in relation to geological structure	<ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be</li> </ul>	<ul> <li>No bias is believed to be introduced by the sampling method.</li> <li>Drilling is designed to intersect the target structure as close to normal as is possible given the constraints of topography and access. In this program no holes were drilled at acute angles to the target structure.</li> </ul>

Criteria	JORC Code explanation	Commentary
	assessed and reported if material.	
Sample security	The measures taken to ensure sample security.	• Samples were delivered to ALS Minerals laboratory in Romania by Prospech trusted contractor and were not left unattended at any time. There were no incident reports from ALS lab on sample receiver cell.
Audits or reviews	<ul> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul> <li>No audits or reviews of the data management system have been carried out.</li> </ul>

# Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</li> </ul>	<ul> <li>Prospech Limited, through subsidiaries and contractual rights, holds 100% rights on the Cejkov Zemplin tenement.</li> <li>The laws of Slovakia relating to exploration and mining have various requirements. As the exploration advances specific filings and environmental or other studies may be required. There are ongoing requirements under Slovakian mining laws that will be required at each stage of advancement. Those filings and studies are maintained and updated as required by Prospech's environmental and permit advisors specifically engaged for such purposes.</li> <li>The Company is the manager of operations in accordance with generally accepted mining industry standards and practices.</li> </ul>
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul> <li>Anciently, the target was silver, the currency of the day, and more recently, during the Communist era, the targets were industrial base metals, copper, lead, zinc and others. As a result, much of the country, including the Company's exploration license areas, has not been subject to modern western exploration methodology or exploitation.</li> <li>Communist-era base metal and coal production was substantial and smelting of aluminium and nickel (material imported from Hungary and Albania) was carried out. Coal, gold, silver, talc, anhydrite and magnesite (and limestone, dolomite and gravel), bentonite, zeolite and industrial minerals are being mined in Slovakia today. An underground gold mine on a third party mining lease enclosed within the HHBS exploration license, the Rozalia Mine, continues in operation today, trucking a gravity/flotation concentrate to a smelter in Belgium.</li> <li>Communist-era gold assays used in Government and private exploration programs have been proven to be unreliable and this must be taken into account when interpreting reports from the Communist era.</li> <li>Prospech holds 100% of Cejkov Zemplin Exploration Concession which has been explored in the past by the Slovak Geological Survey pre 1990s, RTZ (Rio Tinto Zinc) in the late 1990s and Arc Minerals predecessor Ortac Minerals PIc in 2011 to 2012.</li> <li>The Cejkov Zemplin concession is located approximately 66 kilometres south of Eastern Regional city of Kosice in Slovakia, a country member of the European Union and Eurozone.</li> </ul>
Geology	<ul> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul> <li>Located on the Bogrom river the Zemplin prospect is part of the 29.23 Km2, 100%-owned Cejkov-Zemplin Licence, located in eastern Slovakia. Zemplin is prospective for epithermal precious metals and base metals vein-style mineralization in Neogene Volcanics as per the company's projects at Hodrusa, Nova Bana, Rudno and Pukanec.</li> </ul>
Drill hole Information	<ul> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:         <ul> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> </ul>	All below WGS 84 Zone 34N Grid Collar Coordinates

	eri	

#### **JORC Code explanation**

the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.

		Commentary		
Hole_ID	UTM_East	UTM_North	RL	Depth
CZDD005	559201.74	5365624.69	146.288	317.9
CZD D006	559270.6	5365564.82	143.783	327
CZDD007	559271.58	5365565.24	143.721	344.5
CZDD008	559296.03	5365499.97	140.063	302.6
CZD D009	559295.21	5365499.65	140.126	338.9
CZDD010	559188.83	5365197.62	116.056	419.8
				2050.7

Commonton

Survey details for previously unreported drilling;

		· .			
Hole_ID	Depth			TM_Azimu	
CZDD005	0	-59.68	69.86	77.23	Reading from 15m
CZDD005	15	-59.68	69.86	77.23	
CZDD005	50	-59.3	68.82	76.19	
CZDD005	100	-59.09	72.72	80.09	
CZDD005	150	-58.43	71.37	78.74	
CZDD005	200	-57.43	72.11	79.48	
CZDD005	250	-56.5	72.96	80.33	
CZDD005	300	-55.61	73.66	81.03	
CZDD006	0	-69.22	65.18	72.55	Reading from 15m
CZDD006	15	-69.22	65.18	72.55	
CZDD006	50	-69.11	66.8	74.17	
CZDD006	100	-68.38	69.31	76.68	
CZDD006	150	-68.11	69.35	76.72	
CZDD006	200	-67.7	71.42	78.79	
CZDD006	250	-67.47	72.06	79.43	
CZDD006	300	-66.72	72.38	79.75	
CZDD007	0				Reading from 15m
CZDD007	15	-44.25	63.27	70.64	_
CZDD007	50	-44.25	65.8	73.17	
CZDD007	100	-43.24	66.17	73.54	
CZDD007	150	-43.42	66.85	74.22	
CZDD007	200	-42.87	66.89	74.26	
CZDD007	250	-41.83	67.25	74.62	
CZDD007	300	-40.34	67.58	74.95	
CZDD007	344	-40.07	67.49	74.86	
CZDD008	0	-46.54	64.6		Reading from 15m
CZDD008	15	-46.54	64.6	71.97	
CZDD008	50	-45.7	65.63	73	
CZDD008	100	-45.21	66.2	73.57	
CZDD008	155	-44.09	66.65	74.02	
CZDD008	200	-43.01	66.2	73.57	
CZDD008	250	-41.45	66.34	73.71	
CZDD008	300	-41.3	66.78	74.15	
CZDD009	0	-65.24	64.54		Reading from 15m
CZDD009	15	-65.24	64.54	71.91	
CZDD009	50	-64.68	65.96	73.33	
CZDD009	100	-64.96	66.11	73.48	
CZDD009	150	-64.26	65.2	72.57	
CZDD009	200	-64.01	64.8	72.17	
CZDD009	250	-63.61	66.04	73.41	
CZDD009	300	-63.46	65.51	72.88	
CZDD009	335	-62.99	65.44	72.81	
CZDD010	0	-60.51	42.84		Reading from 15m
CZDD010	15	-60.51	42.84	50.21	Account from 1511
CZDD010	50	-60.33	45.2	52.57	
CZDD010	100	-60.05	45.2	53.54	
CZDD010	150	-59.38	40.17	55.16	
CZDD010	200		47.79	56.17	
CZDD010 CZDD010	200	-59.13			
CZDD010	320	-57.97	49.32 48.49	56.69 55.86	
CZDD010	350	-56.15	48.7	56.07	
CZDD010	400	-55.51	48.98	56.35	

Data aggregation methods

- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.
- Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.
- The assumptions used for any reporting of metal equivalent values should be clearly stated.
- The default sample interval is 1 metre but this may vary to take into account geological boundaries. Aggregate intercepts are length-weighted, and no cutting of high grades is considered necessary.

Metal equivalents are not reported

Hole\_ID mFrom mTo SampleID Ag\_ppm Au\_ppm Pb\_ppm Zn\_ppm

1		

			Co	ommen	itary		
CZDD007	88	89	M664990	-0.5	0.01	19	22
CZDD007	89		M664991	-0.5	-0.01	23	29
CZDD007	90	91		-0.5	-0.01	19	44
CZDD007	91	92	M664993	0.6	0.01	21	24
CZDD007	92	93	M664994	-0.5	0.01	21	78
CZDD007	93	94	M664995	1.2	-0.01	24	201
CZDD007	94	95	M664996	0.9	-0.01	23	98
CZDD007	95	96	M664997	1	0.01	24	83
CZDD007	96	97	M664998	0.5	-0.01	21	80
CZDD007	97	98	M664999	1.9	-0.01	31	185
CZDD007	98	99	M665001	1.5	-0.01	22	106
CZDD007	99	100	M665002	5.1	-0.01	35	147
CZDD007	100	101	M665003	5.5	-0.01	39	151
CZDD007	101	102	M665004	3.2	-0.01	32	129
CZDD007	102		M665005	10.8	0.01	72	1775
CZDD007	103	103.5	M665006	14.6	-0.01	137	1595
CZDD007	103.5	104	M665007	98	-0.01	2670	4180
CZDD007	104		M665008	4.3	0.01	94	304
CZDD007	105	106		4.9	0.01	55	721
CZDD007	106	107	M665010	0.9	-0.01	35	672
CZDD007	125		M665011	4.2	0.25	38	160
CZDD007	126		M665012	4.8	0.19	60	343
CZDD007	127		M665013	7.6	0.03	130	563
CZDD007	128		M665014	2.6	-0.01	83	381
CZDD007	129.7		M665015	5.6	0.01	92	805
CZDD007	213		M665035	14.8	0.03	284	898
CZDD007	214	215	M665036	6.7	0.01	188	630
CZDD007	215		M665037	4.5	0.02	146	451
CZDD007	216	217		4.9	0.03	136	538
CZDD007	217		M665039	3.2	0.01	44	305
CZDD007	268		M665040	38.5	0.08	347	3320
CZDD007	269 270		M665041 M665042	11.5		352 113	1225 293
CZDD007 CZDD007	270		M665042	7.1	0.02	113	293
CZDD007	271.5		M665044	2.1	0.03	35	145
CZDD007	272		M665045	3.5	0.01	55	343
CZDD007	274		M665046	3.6	0.01	27	241
CZDD007	275	270	M665047	1.9	0.02	42	176
CZDD007	277		M665048	-0.5	0.01	16	137
CZDD007	278		M665049	0.9	0.01	27	114
CZDD007	304		M665051	3.7	0.04	27	62
CZDD007	305		M665052	0.7	0.01	4	28
CZDD007	306		M665053	3.5	0.04	19	46
CZDD007	307		M665054	5.2	0.05	31	53
CZDD007	318		M665055	3.3	0.02	184	139
CZDD007	319	320	M665056	0.7	0.01	270	172
CZDD007	320	321	M665057	0.6	0.01	41	154
CZDD007	321	322	M665058	3.4	0.02	43	115
CZDD007	322	323	M665059	6.1	0.03	813	859
CZDD007	323	324	M665060	2.1	0.01	25	58
CZDD007	335	336	M665061	2.3	0.05	33	103
CZDD007	336	337	M665062	1.3	0.02	15	102
CZDD007	337	338	M665063	-0.5	0.01	19	101
CZDD007	338	339	M665064	1.2	0.01	40	171
CZDD007	131		M665016	5.4	-0.01	513	2080
CZDD007	149		M665017	2.8	0.01	39	415
CZDD007	150	151	M665018	4.1	0.01	40	347
CZDD007	151		M665019	3.8	0.01	45	384
CZDD007	152	153		5.6	0.04	92	845
CZDD007	164		M665079	1.8	-0.01	15	410
CZDD007	165		M665080	2.9	0.01	24	417
CZDD007	166		M665081	3.4	0.01	27	498
CZDD007 CZDD007	167 168		M665082 M665083	4.7	0.01	58 76	401
CZDD007 CZDD007	168		M665021	5.5			
CZDD007	169		M665022	12.8	0.01	63 712	2820
CZDD007	170		M665022				
CZDD007	171.5		M665024	5.8		407	1130
CZDD007	171.5		M665026	6.1	0.01	304	
CZDD007	172		M665027	5.7	0.02	61	
CZDD007	174		M665028		0.02	69	
CZDD007	175		M665029	16.7	0.02	107	1260
CZDD007	176		M665030		0.02	547	2830
CZDD007	177		M665031	29		564	
CZDD007	178		M665032	21.3		392	4380
CZDD007	179		M665033	17.2	0.03	413	2260
CZDD007	180	181	M665065	3.7	0.01	53	416
CZDD007	181	182	M665066	18	0.02	215	2060
CZDD007	182		M665067	5.4	0.01	203	1360
CZDD007	183		M665068	7.3	0.02	220	1730
CZDD007	184		M665069	4.9	0.01	91	1020
CZDD007	185		M665070	3.8	0.01	250	621
CZDD007	186		M665071	5.1	0.01	151	589
CZDD007	187		M665072	7.1	0.03	174	943
CZDD007		100	M665073	5.2	0.01	239	1055
	188						
CZDD007	189	190	M665074	7.5	0.01	295	1655
CZDD007 CZDD007	189 190	190 191	M665074 M665076	5	0.01	121	627
CZDD007 CZDD007 CZDD007	189 190 191	190 191 192	M665074 M665076 M665077	5	0.01	121 42	627 434
CZDD007 CZDD007	189 190	190 191 192 193	M665074 M665076	5 3 3.9	0.01 0.01 0.01	121	627

Hole\_ID mFrom mTo SampleID Ag\_ppm Au\_ppm Pb\_ppm Zn\_ppm

			Comme	illar y			
CZDD008	136	137	M665084	0.5	-0.01	15	4
CZDD008	137	138	M665085	1	-0.01	28	3
CZDD008	138	138.7	M665086	0.9	-0.01	24	52
CZDD008	138.7		M665087	-0.5	-0.01	16	5
CZDD008	139.3		M665088	1.4	-0.01	43	35
CZDD008	140		M665089	1.8	-0.01	48	26
CZDD008	141		M665090	-0.5	-0.01	16	11
CZDD008	142		M665091	5.6	-0.01	69	122
CZDD008	145.7		M665092	4.9	-0.01	43	34
CZDD008	146.2		M665093	3.1	-0.01	40	55
CZDD008	140.2		M665094	1.7	0.01	22	19
CZDD008	148		M665095	0.5	-0.01	19	24
CZDD008	140		M665096	-0.5	0.01	19	12
CZDD008	150		M665097	-0.5	-0.01	24	36
CZDD008	150		M665098	-0.5	-0.01	24	34
CZDD008	151		M665099	-0.5	-0.01	24	17
CZDD008	152		M665101	-0.5		25	17
					-0.01		
CZDD008	154		M665102	-0.5	-0.01	44	9
CZDD008	155		M665103	-0.5	-0.01	18	12
CZDD008	231		M665104	-0.5	-0.01	17	2
CZDD008	232		M665105	-0.5	-0.01	15	4
CZDD008	233		M665106	-0.5	-0.01	4	4
CZDD008	269		M665107	22.4	0.04	2070	577
CZDD008	270		M665108	4.6	0.01	668	232
CZDD008	271		M665109	0.9	-0.01	30	25
CZDD008	272		M665110	1.7	-0.01	78	32
CZDD008	273		M665111	0.5	0.02	7	12
CZDD008	274		M665112	0.8	0.02	19	21
CZDD008	275		M665113	1.9	-0.01	65	36
CZDD008	276		M665114	0.7	-0.01	12	8
CZDD008	277		M665115	1.1	0.03	12	8
CZDD008	278	279	M665116	3	0.01	20	13
CZDD008	279	280	M665117	1.8	0.01	21	14
CZDD008	280	281	M665118	5	0.02	117	45
CZDD008	281	282	M665119	2.4	0.01	134	28
CZDD008	282	283	M665120	1.4	-0.01	48	20
CZDD008	283	284	M665121	3.6	0.01	92	32
CZDD008	284	285	M665122	2.2	0.1	46	18
CZDD008	285	286	M665123	1.6	0.15	86	31
CZDD008	286	287.4	M665124	1.6	0.18	48	21
CZDD008	287.4	288.4	M665126	11	0.48	2030	802
CZDD008	288.4	289	M665127	11.9	0.04	1365	325
CZDD008	289	290	M665128	9.3	0.73	160	17
CZDD008	290	291	M665129	7.2	0.03	130	8
CZDD008	291	292	M665130	4	0.01	62	17
CZDD008	292	293	M665131	5.5	0.02	59	15
CZDD008	293	294	M665132	6.4	0.08	47	8
CZDD008	294	295	M665133	2.3	0.05	18	9
CZDD008	295	296	M665134	3.2	0.13	22	15
CZDD008	296		M665135	4.5	0.03	22	14
CZDD008	297		M665136	3.6	0.02	39	9
CZDD008	298		M665137	2.2	0.01	29	16
CZDD008	299		M665138	1.3	0.01	15	16
CZDD008	300		M665139	2.4	0.05	49	16
CZDD008	301		M665140	6.2	0.02	328	49
CZDD008	302	552		0.2	0.01	520	+5

			С	omme	ntary		
CZDD009	112	113	M665142	-0.5	0.01	16	50
CZDD009	113	114	M665143	-0.5	-0.01	13	47
CZDD009	114		M665144	-0.5	-0.01		57
CZDD009 CZDD009	133 134		M665145	0.6	-0.01		58
CZDD009 CZDD009	134		M665146 M665147	0.6	-0.01		88
CZDD009	136		M665148	0.5	-0.01	17	57
CZDD009	137		M665149	0.5	-0.01		72
CZDD009	138		M665151				63
CZDD009 CZDD009	139		M665152	-0.5 -0.5	-0.01	11	76
CZDD009	140 141		M665153 M665154	-0.5	0.01	7	49
CZDD009	150		M665155	-0.5			
CZDD009	151		M665156	-0.5	0.01		
CZDD009	152		M665157	-0.5	-0.01		
CZDD009	170		M665158				
CZDD009	171		M665159	9.5	0.03		
CZDD009 CZDD009	172 173		M665160 M665161	7.4			427
CZDD009	174		M665162		0.01		206
CZDD009	175		M665163	2.4	0.03		146
CZDD009	176		M665164	2.4	0.01	36	231
CZDD009 CZDD009	177		M665165 M665166	-0.5 -0.5	-0.01		241 190
CZDD009	178		M665167	-0.5	-0.01		
CZDD009	180		M665168	4.8			
CZDD009	180.8	181.3	M665169	516	0.74		2090
CZDD009			M665170				530
CZDD009	182		M665171	-0.5			
CZDD009 CZDD009	188 189		M665172 M665173	0.6			
CZDD009	189		M665173 M665174	3.8	0.01		427
CZDD009	191	191.5	M665176	7	0.02	1570	6270
CZDD009	191.5	192.5	M665177	1.5	0.01	60	274
CZDD009	192.5	194	M665178	3.9	0.02	86	360
CZDD009	194		M665179	a contraction of			63
CZDD009 CZDD009	194.5 232		M665180 M665181	-0.5	0.04		134 147
CZDD009	232		M665182	1.5	0.01		147
CZDD009	234		M665183	3.8		95	423
CZDD009	235		M665184	2.6		24	72
CZDD009	236		M665185	3			
CZDD009 CZDD009	237 238		M665186 M665187	1	0.01		80 219
CZDD009	238		M665188	6.9			
CZDD009	253.6		M665189	-0.5	-0.01		103
CZDD009	254.1	254.6	M665190	3.2	0.01	3170	6580
CZDD009	254.6		M665191	3.9	0.02		
CZDD009	255.6	256.6	M665192	9.5	0.05	42	80
CZDD009 CZDD009	327 328		M665193 M665194	1.3			
CZDD009	329		M665195	0.5	-0.01		
CZDD009	330		M665196	1.2	-0.01	179	709
CZDD009	331		M665197	1.9	0.01		480
CZDD009	332		M665198	1.6	0.01		
CZDD009 CZDD009	333 334		M665199 M665201	-0.5	0.01		
CZDD009	335		M665202	-0.5	0.01		82
CZDD009	336		M665203	-0.5	-0.01		79
CZDD009	337		M665204	-0.5	-0.01		249
CZDD009	338	338.8	M665205	-0.5	-0.01	13	79
CZDD010	261	767	M665206	-5	-0.01	11	42
CZDD010	262		M665207	-5	-0.01	11	103
CZDD010	263		M665208	-5	-0.01	11	17
CZDD010	264		M665209	-5	-0.01		100
CZDD010	265		M665210	-5	-0.01	9	58
CZDD010 CZDD010	266		M665211 M665212	-5	-0.01 -0.01	8	148 154
CZDD010	306		M665213	-5	-0.01	34	71
CZDD010	307		M665214	-5	-0.01		77
CZDD010	308		M665215	-5	-0.01	36	90
CZDD010	309		M665216	1.3	0.01		
CZDD010	310		M665217 M665218	4	-0.01	38	149
CZDD010 CZDD010	311 312		M665218 M665219	13.1 3	0.01	5350 458	21400 1415
CZDD010	313		M665220	-5	0.01	53	58
CZDD010	314		M665221	-5	0.01		68
CZDD010	336		M665222	0.8	0.01		229
CZDD010 CZDD010	337 338		M665223 M665224	1.2	0.01	38 115	382 132
CZDD010	338		M665224 M665226		0.01	215	132
CZDD010	340		M665227	3	0.02	81	123
CZDD010	341		M665228	2.2	0.02		208
CZDD010	342		M665229	4.8	0.01		167
CZDD010	343		M665230	4.3	0.02		191
CZDD010 CZDD010	344		M665231 M665232	2.6	0.02	50 45	110 198
CZDD010	345		M665233	1.5	0.01	43	138
CZDD010	347	348	M665234	0.8	0.01		185
CZDD010	348		M665235	3.5	0.04	111	153
CZDD010	349		M665236	8.1	0.08	111	211
CZDD010 CZDD010	350		M665237 M665238	2.5	0.04	82 47	207
CZDD010	351		M665239	-5	0.02		113
CZDD010	353		M665240	0.7	0.02		100
CZDD010	354	355	M665241	-5	0.01	20	97
CZDD010	355		M665242	0.6	0.01	25	111
CZDD010	356		M665243	4.7	0.06	548	341
CZDD010 CZDD010	356.8		M665244 M665245	33.8 5.9	0.17	4720 130	7400 454
CZDD010	357.8		M665245	9.6	0.08		6230
CZDD010	360		M665247	3		2620	
	361		M665248	1.9	0.02	186	761
	362		M665249	1.3	0.02	61	91
CZDD010 CZDD010		364	M665251	1.3	0.02		78
CZDD010 CZDD010	363		MAGESTER	A 7			
CZDD010 CZDD010 CZDD010	364	365	M665252 M665253	0.7	0.01		
CZDD010 CZDD010	364	365 417	M665252 M665253 M665254	0.7 0.6 0.6	0.01 0.03 0.02	22	146 245
CZDD010 CZDD010 CZDD010 CZDD010	364 416	365 417 418	M665253	0.6	0.03	22	146

JORC Code explanation

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<ul> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul>	<ul> <li>All drill holes results returned from four-hole program.</li> <li>All thickness reported are down-hole</li> <li>At this stage the relationship between drilled width and true width cannot be reliably estimated.</li> </ul>
Diagrams	<ul> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	The location and results received for drill-core samples are displayed in the attached maps and/or tables. Coordinates are UTM Zone 34N.
Balanced reporting	<ul> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul> <li>Results for all mineralised samples collected in this program are displayed on the attached maps and/or tables.</li> </ul>
Other substantive exploration data	<ul> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul> <li>No metallurgical or bulk density tests were conducted at the project by Prospech.</li> </ul>
Further work	<ul> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul> <li>Further drilling has been planned at Zemplin to test the silver-bearing lodes along strike and at depth.</li> </ul>